



**NRB group**

NRB DOOR

# CONTENT

01 Product Range

04 Melamine Doors

07 Fire Rated Doors

02 Lacquered Doors

05 Molded Panel Doors

08 Technical Specifications

03 PVC Doors

06 Wood-Veneered Doors

09 Accessories Set & Door Set Components






# NRB Door

NRB Door has been specialised in wooden interior doors, door frames and moldings.

Over the years, the evolution of architecture demands has turned doors into a key feature of interior design. Under this premise, NRB Door continuously works and finds inspiration from designers to deliver custom made to measure interior design doors with maximum versatility.

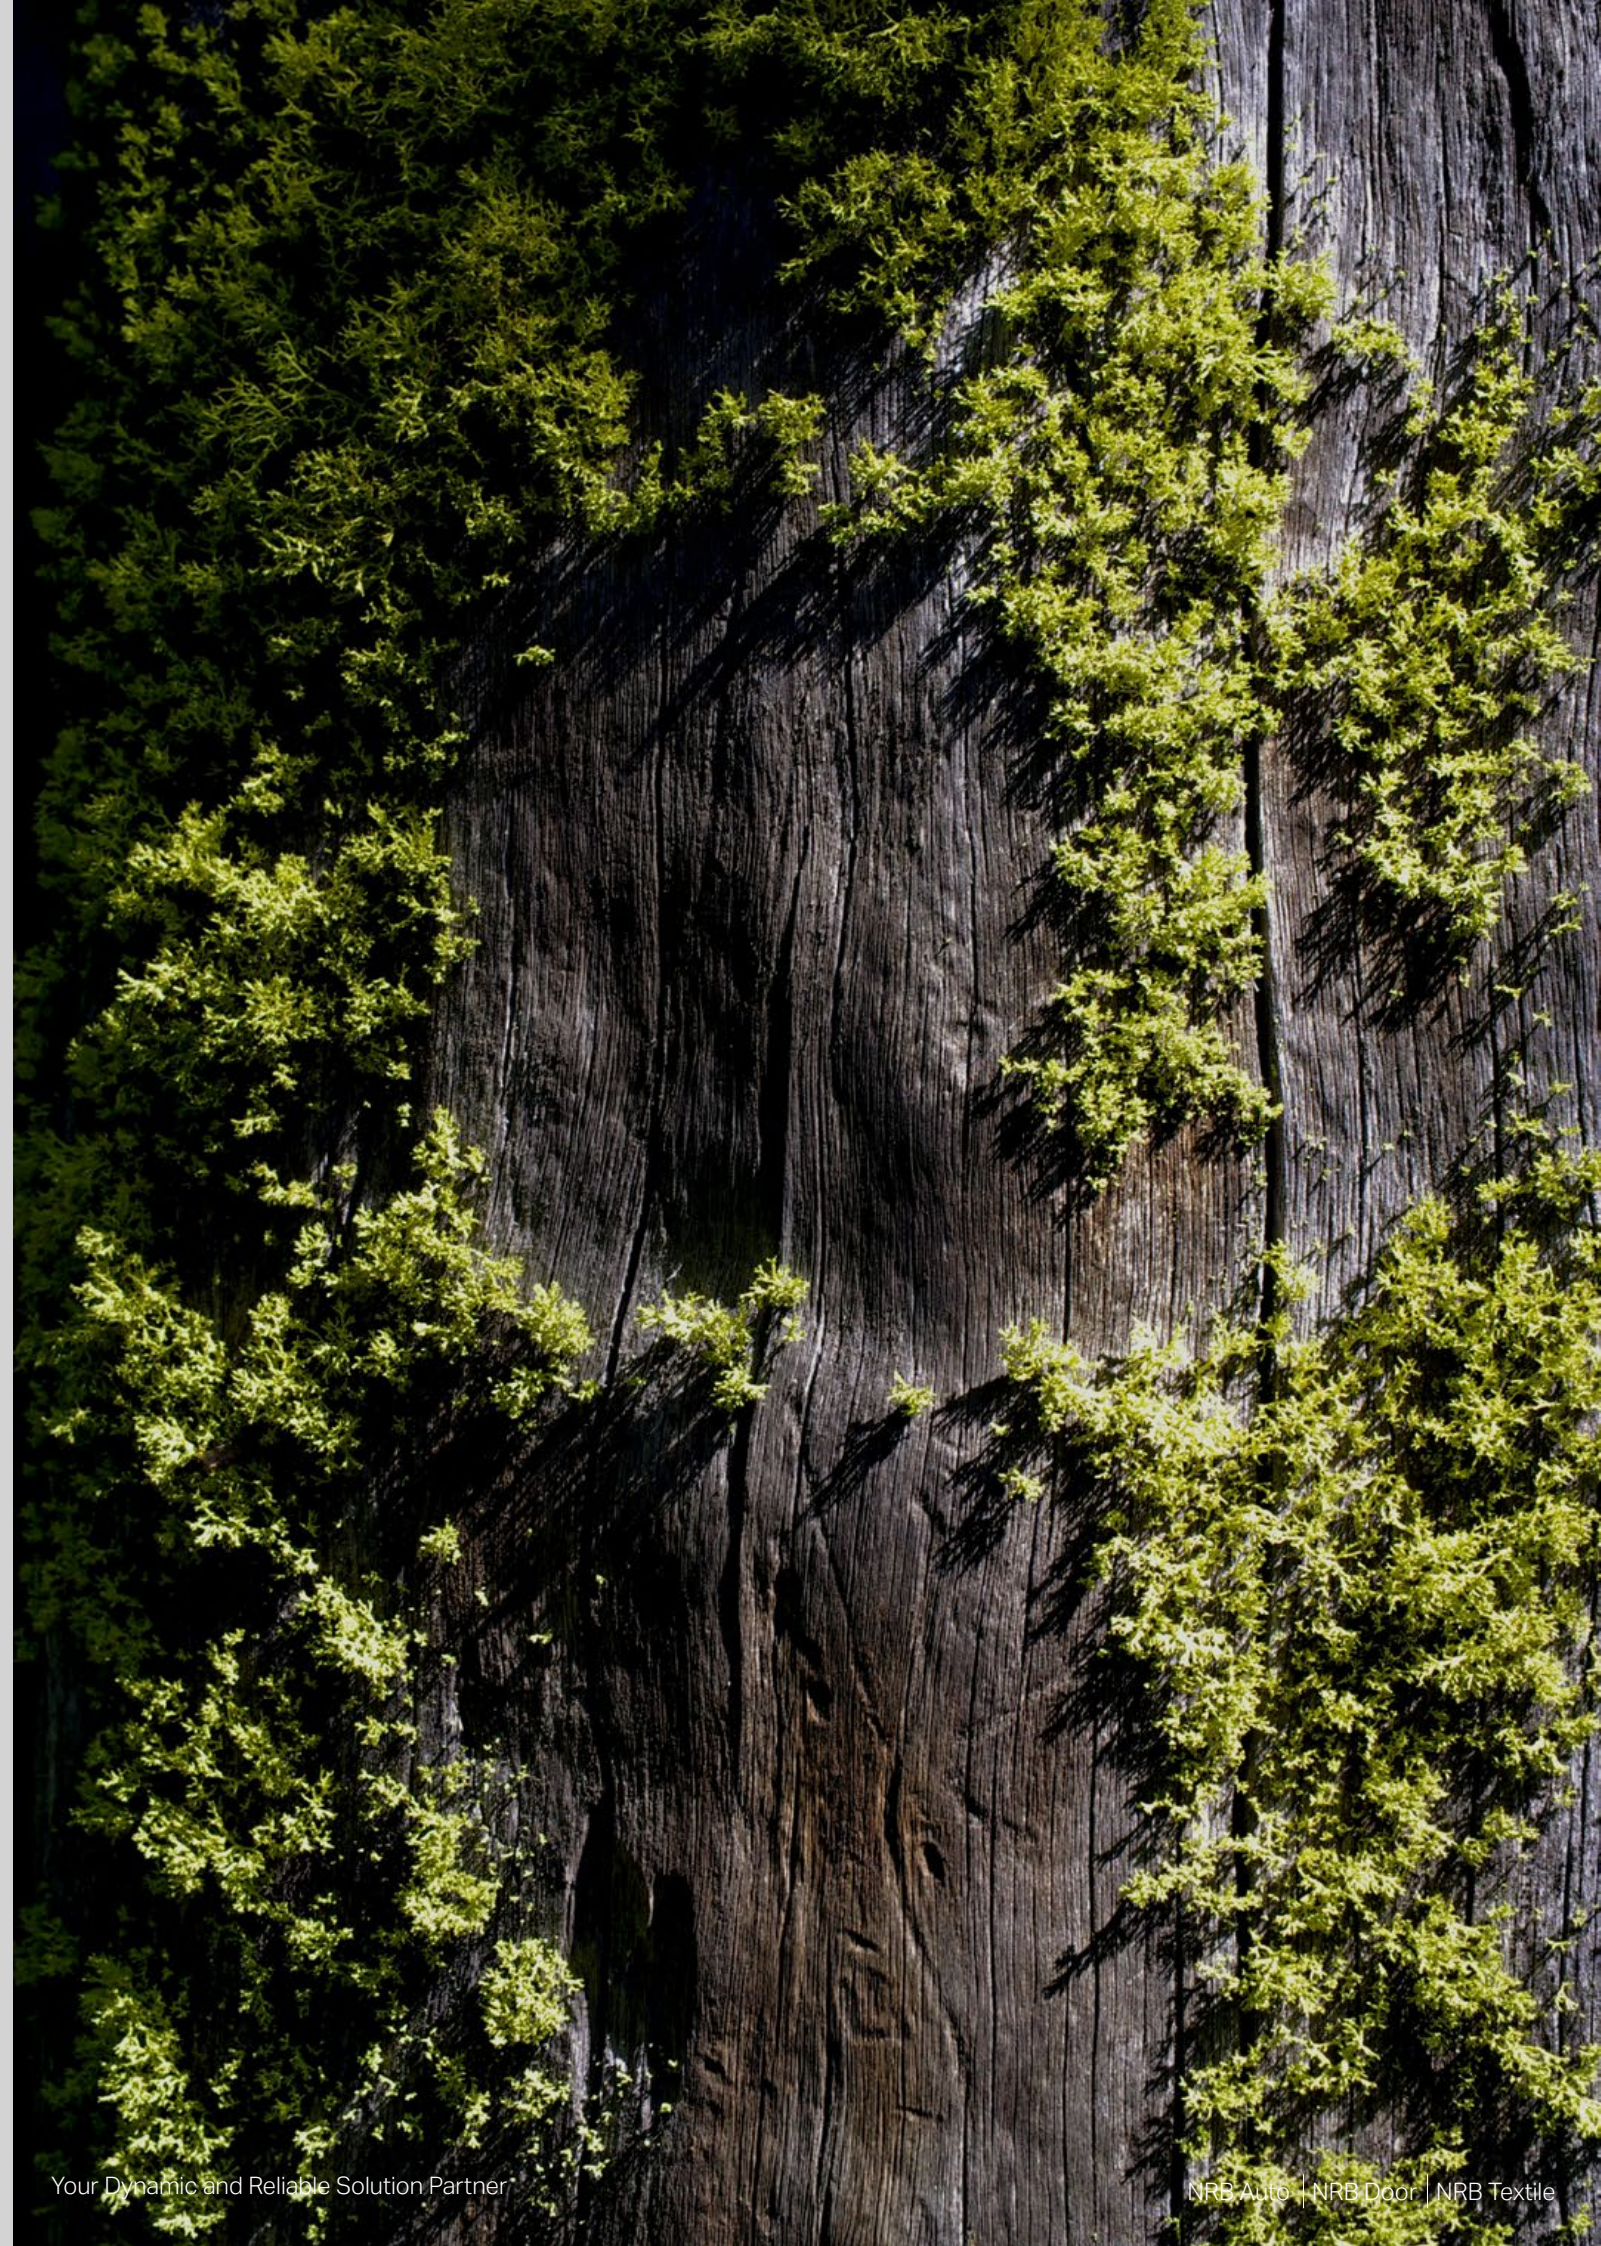




01

# Product Range

High-quality wooden doors including wood-veneered, lacquered, melamine-faced, PVC-faced, laminate, molded panel, and fire-rated options for durable and stylish interiors.



Lacquered Doors

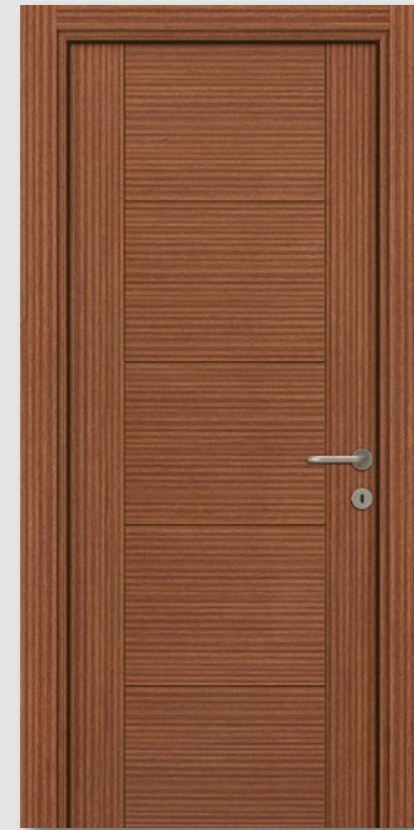

Wood - Veneered Doors



PVC-Faced Doors



Melamine-Faced Doors



Molded Panel Doors



Laminate Doors

02

# Lacquered Doors

## Surface

6 / 12 / 18 mm MDF

## Case

Lacquered PP-faced 36 / 42 mm thick Laminated MDF Board

## Molding

Lacquered PP-faced 9/12/18 mm thick MDF Board



LF 001



LF 028



LF 056



BENFICA I



PORTO II




SOLID III



BENFICA I-C



DORE II-C

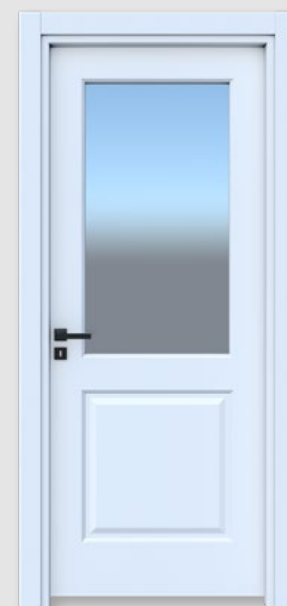

SOLID II-C

03

# PVC Doors

## Surface

6 mm MDF

## Case


PVC-faced 36 mm Laminated MDF Board

## Molding

PVC-faced 9/12/18 mm thick MDF Board




PF 002

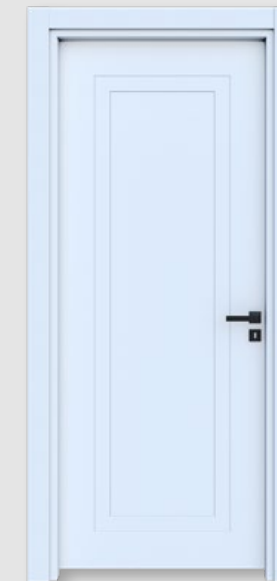

PF 026




PF 028 II

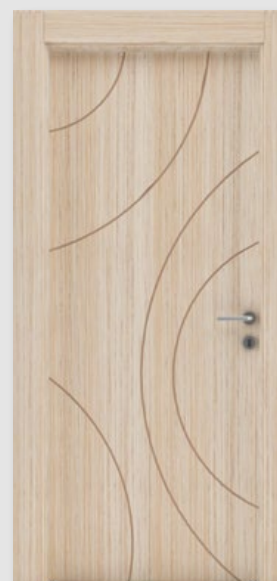


PF 011




PF 014

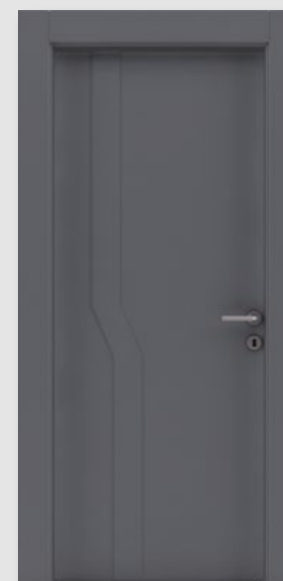

PF 007

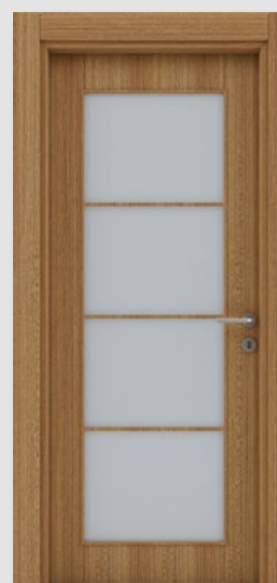

PFC 001

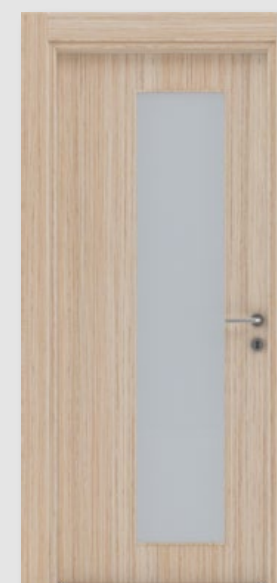

PFC 002



PFC 003

04

# Melamine Doors

## Surface

4 mm MDF

## Case


Melamine-faced 36 mm Laminated MDF Board

## Molding

Melamine-faced 9/12/18 mm thick MDF Board



AKMEŞE-0111

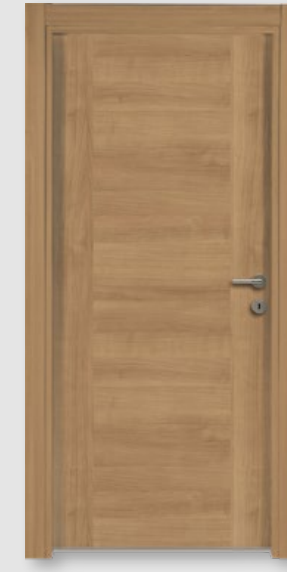

AMERIKAN-KİRAZ 11



BAMBU-00111



BASAK-012



CEVİZ-00111



PLUS-BUTİK-BUZ-MESE111



MC 001



MC 02



MC 003

05

# Molded Panel Doors

## Surface

3,2 mm HDF

## Case

PP-faced 36 mm Laminated MDF Board

## Molding

PP-faced 9/12/18 mm thick MDF Board



A 005



A 006



A 007



A 009



A 005-C



A 006-C



A 007-C



A 009-C



06

# Wood-Veneered Doors

## Surface


6 mm MDF

## Case


Wood-veneered 42 mm Sandwich Panel

## Molding


Wood-veneered 9/12/18 mm thick MDF Board

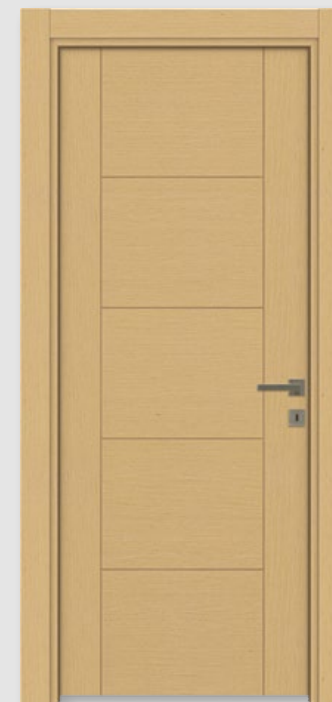


K 001  
OAK

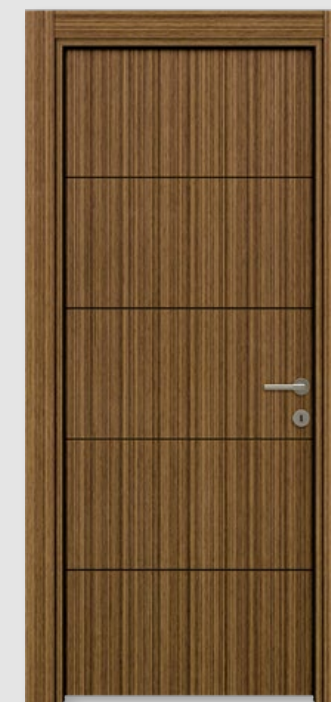

K 004  
WALNUT

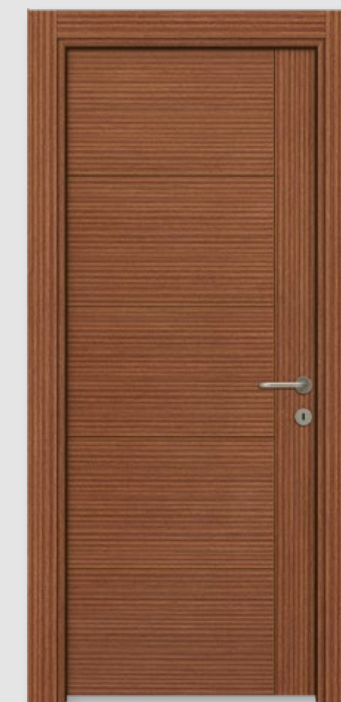

K 005  
MAHOGONY

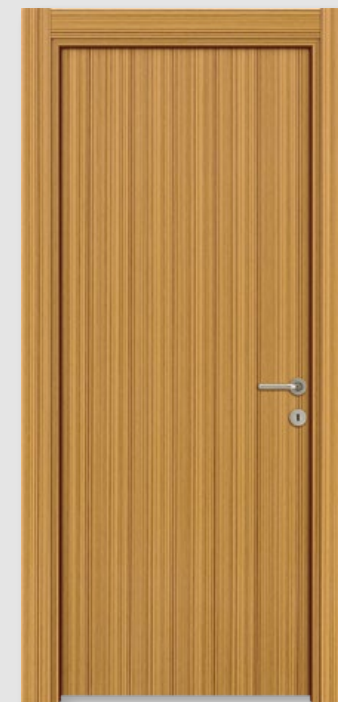

K 007  
OLIVE



K 001-C  
OAK



K 006-C  
TEAK



K 005-C  
NATURAL BAMBOO



K 009-C  
MAHOGONY

07

# Fire Rated Doors

NRB Door fire resistant wooden door sets have been tested and reported by internationally accredited organizations.

All our fire resisting doors are manufactured with solid cores. These provide varying levels of fire protection depending on the rating. These ratings start at FD30, which offers 30 minutes fire protection. We also have the option of FD60 rated fire doors, which as the number suggests, offers up to 60 minutes of protection from fire.



## Doors for hotels and public spaces

### 30 min

Fire-rated Tubular Chipboard - Thickness : 35 mm  
Leaf Thickness: 47 mm  
Threshold Seal  
Four Pieces Stainless Steel Hinges  
Card Operated Lock & Stainless Steel Handle  
Concealed Door Closer  
Frame Seals: Acoustic and Smoke Seal  
Intumescent Fire Seal & Intumescent Fire Seal  
Intumescent Sheet with a Pile



### 60 min

Fire-rated Solid Chipboard - Thickness : 38 mm  
Leaf Thickness: 58 mm  
Threshold Seal  
Four Pieces Stainless Steel Hinges  
Card Operated Lock & Stainless Steel Handle  
Concealed Door Closer  
Frame Seals: Acoustic and Smoke Seal  
Intumescent Fire Seal & Intumescent Fire Seal  
Intumescent Sheet with a Pile



fire rated doors can be chosen with either **30 minutes** fire resistance or with a **higher resistance of 60 minutes**


08

# Technical Specifications

NRB Door considers quality and sustainability in the choice of materials and working processes, and for carrying out it's operations.


Testifying to its continuous improvement, the company obtained the specific certifications entity for the furniture production and forest based industries. We have certified all our work processes in compliance with the ISO 9001 Quality, ISO 10002 Customer Satisfaction, ISO 14001 Environment, OHSAS 18001 Occupational Health and Safety, TSE and FSC. Best Door develops products with high quality and exceptional results.

## Door Cross Section

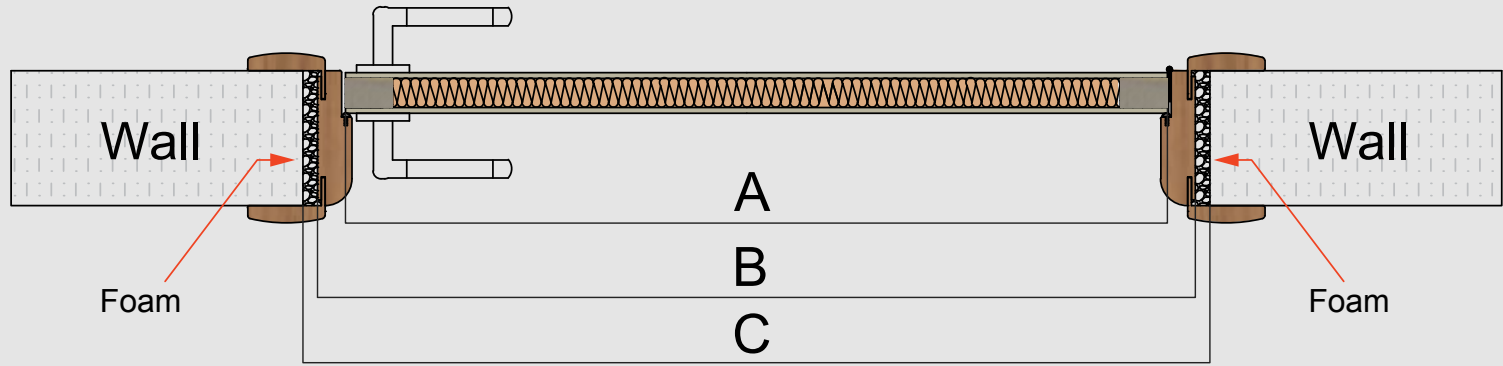

	A	B	C	
	Total Leaf (mm)	Case Width (mm)	Width of Wall Opening (mm)	
	700	760	780-820	
	750	810	830-870	
	800	860	880-920	
Molding: 09x80 mm	850	910	930-970	
Leaf Thickness : 42 mm	900	960	980-1020	
Case Thickness : 36 mm				

## Door Side Section

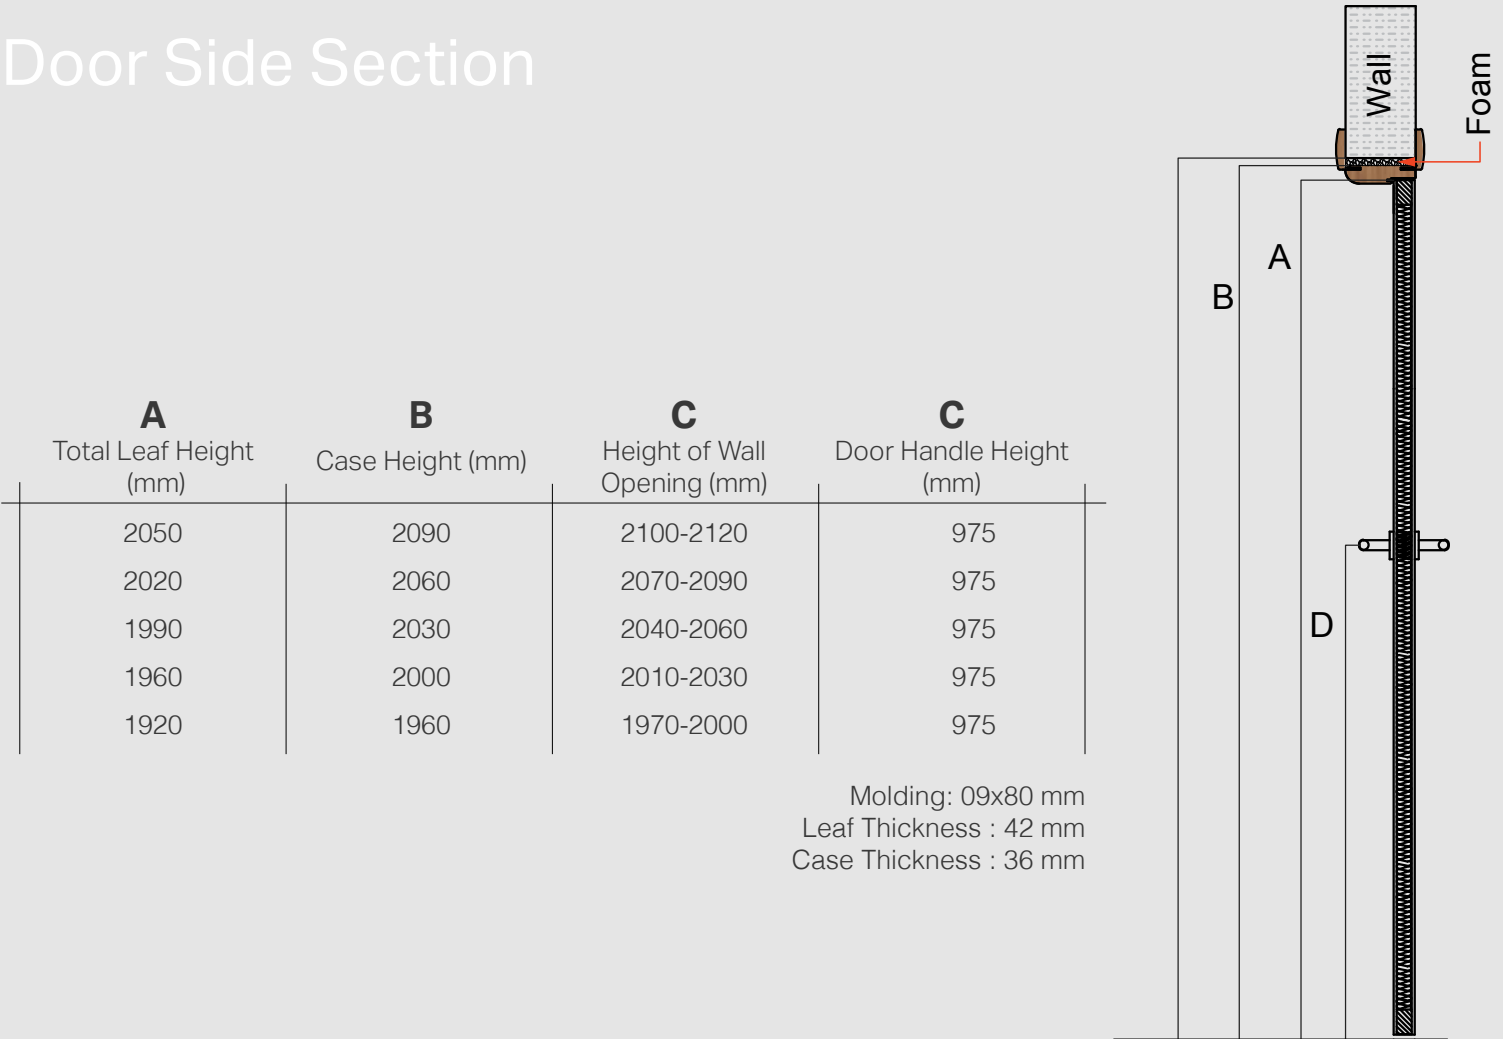

A	B	C	C
Total Leaf Height (mm)	Case Height (mm)	Height of Wall Opening (mm)	Door Handle Height (mm)
2050	2090	2100-2120	975
2020	2060	2070-2090	975
1990	2030	2040-2060	975
1960	2000	2010-2030	975
1920	1960	1970-2000	975

Molding: 09x80 mm  
Leaf Thickness : 42 mm  
Case Thickness : 36 mm



09

# Accessories Set & Door Set Components

## Door Set Components



LEAF

CASE SET  
2,5 BOY / 2,5 PCS

MOLDING SET  
5 BOY / 5 PCS

## Accessories Set



DOOR HANDLE

INSET LOCK

STAINLESS  
HINGES

RUBBER SEAL

DOWEL  
SCREWS

Your Dynamic and Reliable Solution Partner



[www.nrb.com.tr](http://www.nrb.com.tr)



[info@nrb.com.tr](mailto:info@nrb.com.tr)

Nuri Bilge / General Manager: +90 (537) 833 81 74  
Aslı Bilge / Vice President: +90 (536) 069 47 41